


0 000 NISSAN Qashqai

TYPE: J12, 5-door SUV (2021 -)



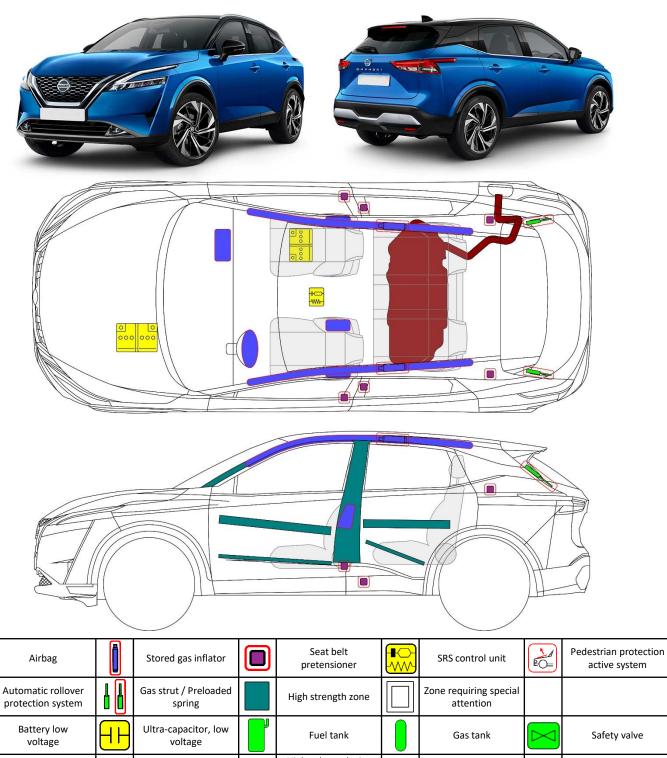

| 00 | Battery pack, high voltage | N | High voltage power cable / component | 2 | that | oltage device disconnects gh voltage | | Fuse bo | x disabling high voltage | - <u> </u> | High voltage ultra-capacitor, |
|---|---|---|--------------------------------------|------------|------|--|------------|---------|-----------------------------|------------|----------------------------------|
| | Fuel tank content Gasoline / Ethanol | | | | | | | | | | |
| NISSAN AUTOMOTIVE EUROPE SAS | | | | Document N | l° | | Version N° | | Page N° | | |
| in co-operation with Moditech Rescue Solutions Mar2021 | | | SJNTxxJ12Ux1xxxxxx | | (| 02 | | 1/4 | | | |

Nissan Qashqai Type: J12, 5dr SUV (2021 -) – Additional Pages

1. Identification / recognition



2. Immobilization / stabilization / lifting

Immobilize vehicle:


- 1. Block wheels
- 2. For automatic transmission select the P (park) position
- 3. Set parking brake
- 4. Press start/stop button



Lifting points:




Appropriate lifting points;

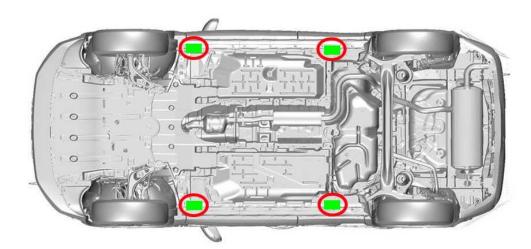

| NISSAN AUTOMOTIVE EUROPE SAS | Document N° | Version N° | Page N° |
|---|--------------------|------------|---------|
| in co-operation with Moditech Rescue Solutions Mar2021 | SJNTxxJ12Ux1xxxxxx | 02 | 2/4 |

3. Disable direct hazards / safety regulations


Access to the engine compartment








Disconnect the 12 Volts battery





- 1. Switch off the ignition
- 2. Disconnect the negative terminal (-)
- 3. Disconnect the positive terminal (+)

4. Access to the occupants


Seat adjustment

High strength steel in body



High strength steel in door









Glass types:

- A. Laminated glass.
- B. Tempered glass.

Β.







| NISSAN AUTOMOTIVE EUROPE SAS |
|--|
| in co-operation with Moditech Rescue Solutions |
| Mar2021 |

| Document N° | Version N° | Page N° |
|--------------------|------------|---------|
| SJNTxxJ12Ux1xxxxxx | 02 | 3/4 |



Towing precautions

| 2WD | | | | |
|-----|-----------|--------|--|-----------|
| 4WD | -01-01-Ep | -0-40T | | A X C |

10. Explanation of pictograms used

| | | General warning sign | | Flammable | | |] |
|------------------------------|---|---------------------------------|---|----------------------------------|------------|---------|---|
| | | Warning; low temperature | ** | Hazardous to the human health | | | |
| | * | Air-conditioning component | | Explosive | | |] |
| | Ē | Vehicle on fuel of liquid gr. 2 | Real Provide Action of the second sec | Corrosives | | | |
| Î | | Bonnet | Image: A start of the start of | Use water to extinguish the fire | | | |
| NISSAN AUTOMOTIVE FUROPE SAS | | | Document I | ۷° | Version N° | Page N° | |

| NISSAN AUTOMOTIVE EUROPE SAS | Document N° | Version N° | Page N° |
|---|--------------------|------------|---------|
| in co-operation with Moditech Rescue Solutions Mar2021 | SJNTxxJ12Ux1xxxxxx | 02 | 4/4 |